

## Features:


- Two-way active speaker with one 8" woofer and one 1" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 8" woofer is made from  $\varnothing 50\text{mm}$  copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable  $90^\circ \times 60^\circ$  (HxV) dispersion horn makes it suitable for any performance purposes.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.



## Technical Parameters



System:	Built-in crossover two way full range active speaker
Driver Quantity:	10" LF Woofer And 34 mm HF Compression Driver
Frequency Response(-3dB):	55 Hz-18 kHz
Frequency Response(-10dB):	50 Hz-20 kHz
Max.SPL (1m):	117dB
Level Adjust range:	$\pm 10\text{dB}(100\text{ Hz})$ -Bass $\pm 10\text{dB}(10\text{ kHz})$ -Treb
Power(RMS):	100 W LF, 50 W HF
Power(PROGRAM):	200 W LF, 100 W HF
Power(MAX):	400 W LF, 200 W HF
Distortion:	Line-0.02%, Microphone-0.04%
Rotatable horn(HxV):	$90^\circ \times 60^\circ$
Load impedance:	Treb - 8 Ohm, Bass - 8 Ohm
Input impedance:	Line - 20 kOhm, Microphone - 10 kOhm
Connectors:	XLR K3P
Power supply:	240V $\sim \pm 10\%$ /50 Hz
Dimensions(WxDxH mm/pcs):	321 $\times$ 321 $\times$ 464 mm
Packing Dimensions(WxDxH mm/pcs)	375 $\times$ 355 $\times$ 535 mm
Net Weight(kg/pcs):	10.5 kg
Gross Weight(kg/pcs):	11.8 kg

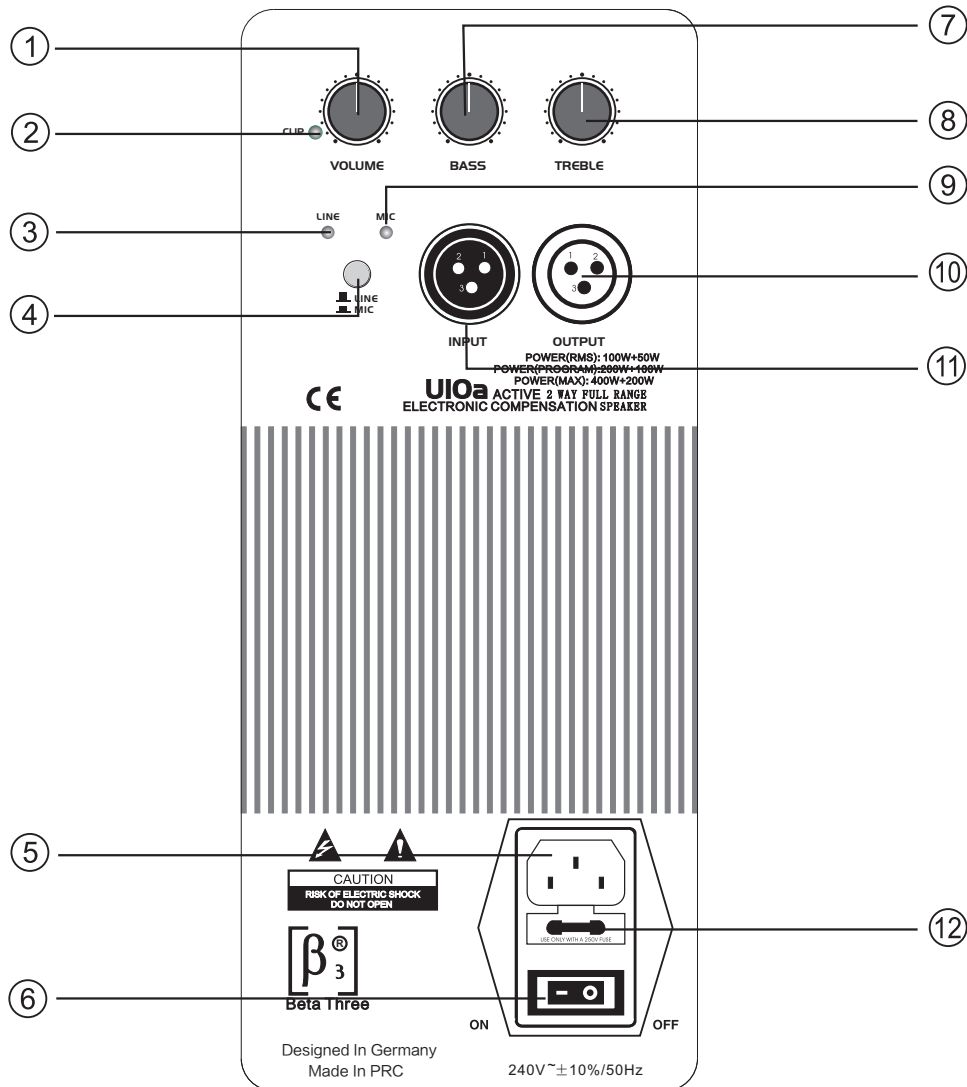

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>1. Volume control</li> <li>2. Clip indicator.</li> <li>3. Line input signal presence indicator.</li> <li>4. Line/microphone selector.</li> <li>5. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.</li> <li>6. Power ON/OFF switch.</li> </ul> | <ul style="list-style-type: none"> <li>7. Bass control.</li> <li>8. Treble control.</li> <li>9. Microphone input signal presence indicator.</li> <li>10. Line/microphone output.</li> <li>11. Line/microphone input.</li> <li>12. Protection fuse. Use only fuses of the correct amp rating.</li> </ul> |
|---|---|

*Cosmetic changes may be made*

