

## Features:


- Two-way active speaker with one 8" woofer and one 1" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 8" woofer is made from  $\varnothing 35\text{mm}$  copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable  $90^\circ \times 60^\circ$  (HxV) dispersion horn makes it suitable for any performance purposes.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.



## Model:U8a

### Technical Parameters

System:	Built-in crossover two way full range active speaker	
Driver Quantity:	8"x1(Bass)	1 x $\varnothing 34\text{mm}$ Driver
Frequency Response(-3dB):	65Hz-18KHz	
Frequency Response(-10dB):	55Hz-18KHz	
Max Sound Level(dB/1M):	110dB	
Level Adjust Range:	$\pm 10\text{dB}(100\text{Hz})$ - Bass $\pm 10\text{dB}(10\text{KHz})$ - Treb	
Output Power:	100W(Bass)+50W(Treb)	
Distortion:	Line-0.02%, Microphone-0.04%	
Tweeter Dispersion(HxV):	$90^\circ \times 60^\circ$	
Load Impedance:	Treb - 8Ohm, Bass - 8 Ohm	
Input Impedance:	Line - 20KOhm, Microphone - 10KOhm	
Connectors:	XLR K3P	
Power Supply:	AC 110-220V, 50Hz/60Hz	
Dimensions(WxDxH mm/pcs):	277X265X407mm	
Packing Dimensions(WxDxH mm/pair)	595X310X460mm	
Net Weight(Kg/pcs):	8.6Kg	
Gross Weight(Kg/pair):	18.6Kg	

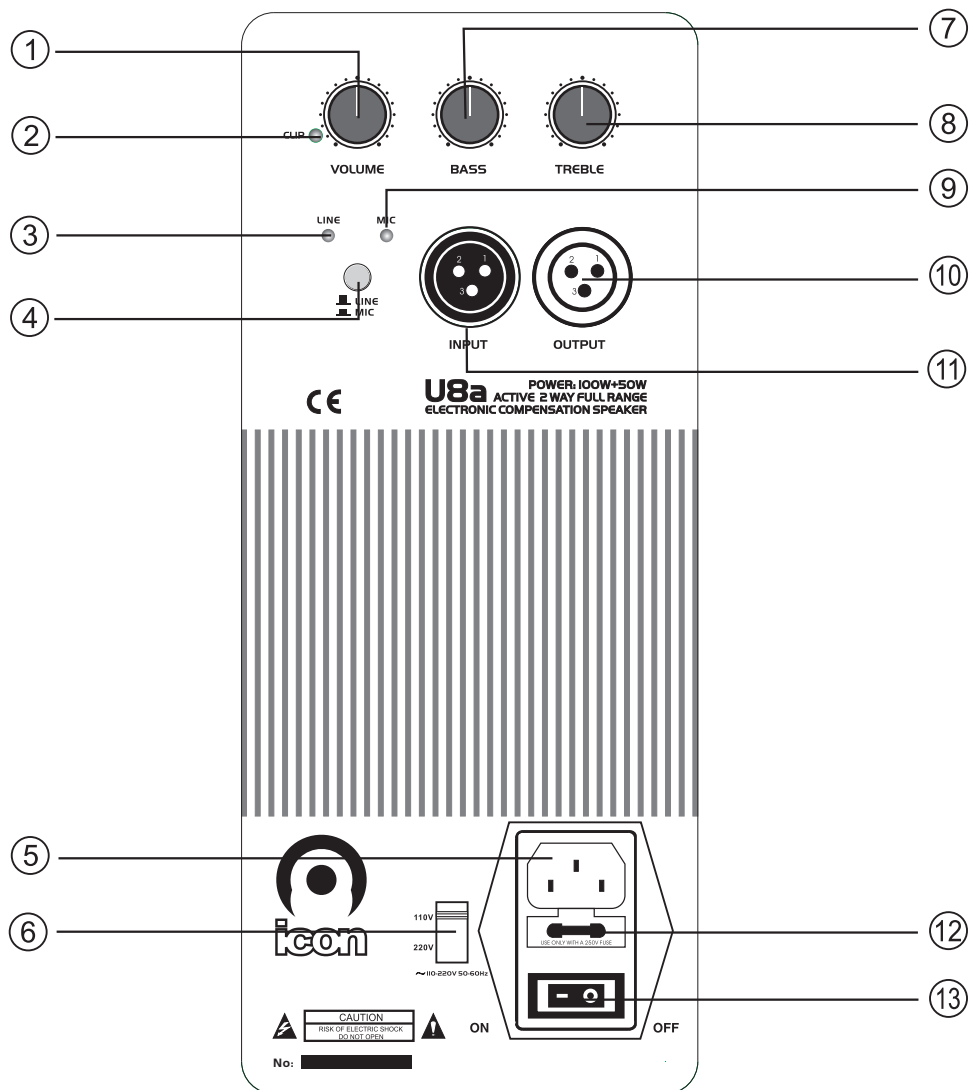

- |                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>1. Volume control</li> <li>2. Clip indicator.</li> <li>3. Line input signal presence indicator.</li> <li>4. Line/microphone selector.</li> <li>5. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.</li> <li>6. 110V/220V voltage input selector.</li> <li>7. Bass control.</li> </ul> | <ul style="list-style-type: none"> <li>8. Treble control.</li> <li>9. Microphone input signal presence indicator.</li> <li>10. Line/microphone output.</li> <li>11. Line/microphone input.</li> <li>12. Protection fuse. Use only fuses of the correct amp rating.</li> <li>13. Power ON/OFF switch.</li> </ul> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

*Cosmetic changes may be made*

