


CMR20T

5.25" two-way loudspeaker



CMR20T is a very compact and performant two-way rectangular 100 volt built-in speaker, provided with a 5.25" polypropylene woofer and 1" tweeter. The two-way aspect makes the loudspeaker very suitable for the reproduction of both background music and microphone calls.

Its 20 watts 100 volt transformer (with several power tapings) makes the CMR20T the ideal solution for rooms with high ceilings and/or rooms which need a higher power level.

The different power tapings can be selected by the switch that is hidden behind the loudspeaker grille.

The loudspeaker is easy to install, due to its simple, quick mounting system (4 screws which are hidden behind the loudspeaker grille), which gives the loudspeaker a modern and striking design.

The CMR20T loudspeakers can be painted in any colour.


TECHNICAL SPECIFICATIONS

height in mm	170	width in mm	237
depth in mm	73	cutout in mm	146 x 213
installation grip range in mm	3 - 17	loudspeaker system	2-way
woofer size in inch	5.25	woofer cone material	polypropylene
tweeter size in inch	1	mounting system	4 screws
colour	white	100V transformer power taps in watts	20 - 10 - 5 - 2.5
impedance in ohms	16	low impedance dynamic power in watts	60
low impedance RMS power in watts	40	SPL 1W/1m in dB	85
max SPL 1m in dB	100	frequency response in Hz	60 - 20K
main construction material	ABS plastic	grille main material	aluminium
IP rating	54	applicable low impedance	yes
applicable in 100V	yes	Horizontal dispersion angle 1000 Hz	180°
Vertical dispersion angle 1000 Hz	180°	closest RAL colour (subject to deviations)	RAL9010
Net weight product in kg	1.30		

POLAR PLOTS


Data Shown: CMR20T (Apart Audio)
Display Parameters: Frequency: 1000Hz (1/24th Octave)

— Horizontal
— Vertical

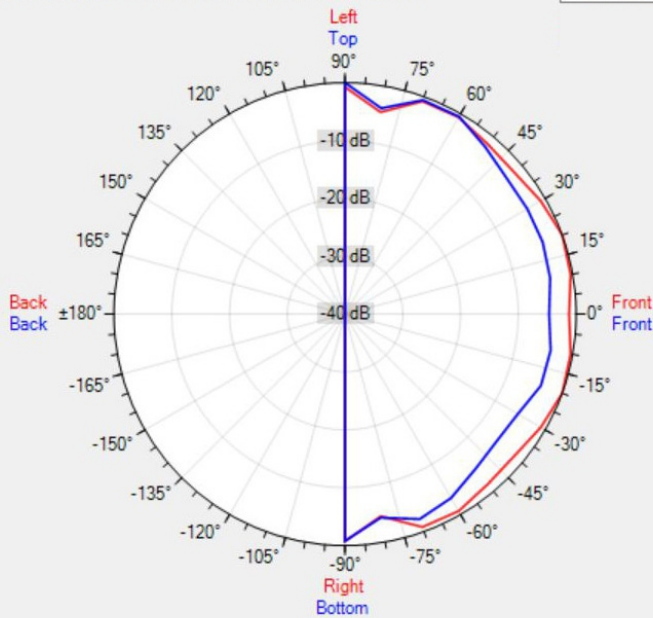


Data Shown: CMR20T (Apart Audio)
Display Parameters: Frequency: 2000Hz (1/24th Octave)

— Horizontal
— Vertical

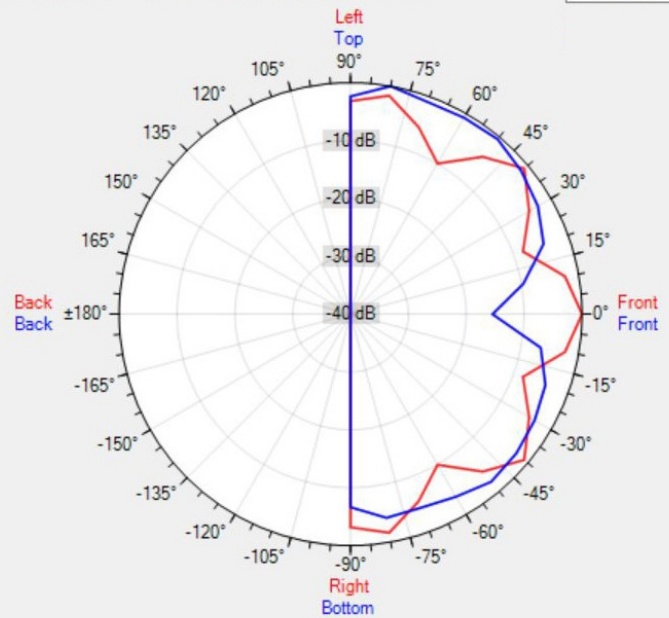


Data Shown: CMR20T (Apart Audio)
Display Parameters: Frequency: 4000Hz (1/24th Octave)

— Horizontal
— Vertical

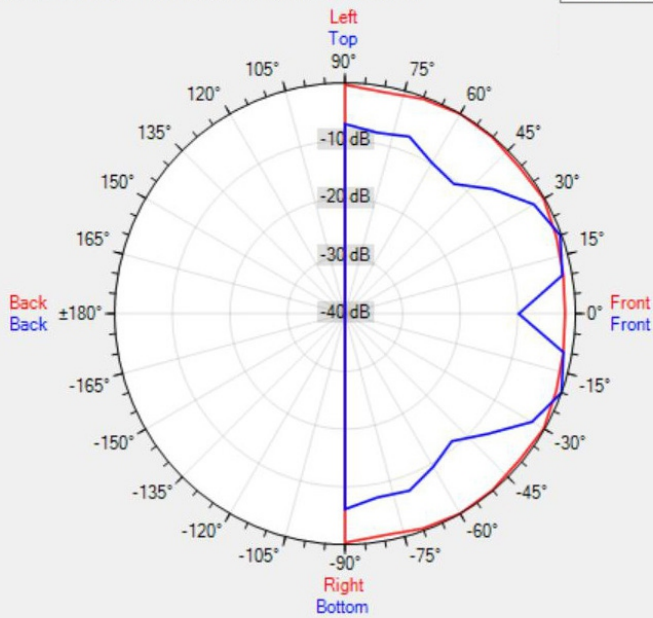


Data Shown: CMR20T (Apart Audio)
Display Parameters: Frequency: 8000Hz (1/24th Octave)

— Horizontal
— Vertical

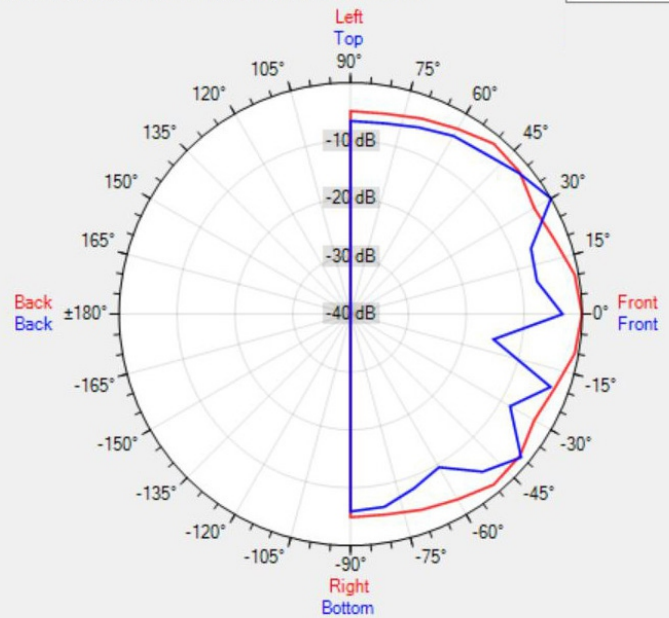

MORE PICTURES

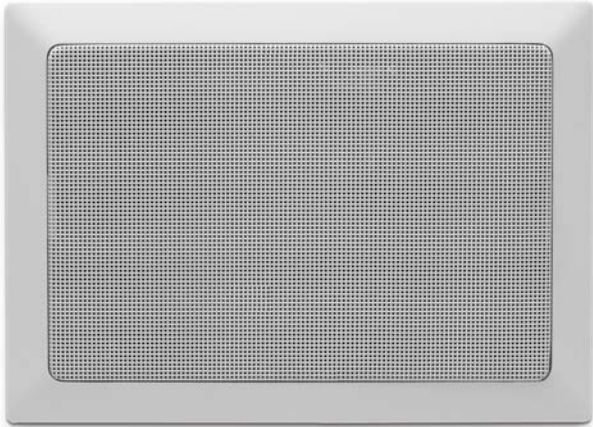

ACCESSORIES



CMRBBI

In-wall box for CMR loudspeaker range



CMRBB

on-Wall box for CMR loudspeaker range