



Ra8 Active **R8s Passive**

1 SET

Period Of Validity: 7/1/2008 - 7/1/2009

**Extra amplifier
is not necessary**


115dB

Max SPL

Optimized design with attractive price

FEATURES

- **Optimized Design With Attractive Price**
- **Fast and Easy installation**
It only takes several minutes to finish connection and adjustment of the whole system.
- **Outstanding Portability**
The whole system can be put in 2 bags easily and carried by one person.
- **Excellent Sound Quality**
Coaxial design, reduce the sound interference effectively. Stereo Input, excellent reproduction of music.
- **Wide Range Application**
Suitable for all small/medium applications, like the bands, conference, and others .
- **Flexible Extension**
Several groups of system can be easily connected if one system is not enough.
- **Compact System**
Use minimum equipments to meet the sound reinforcement requirement, leave more space for the performers.

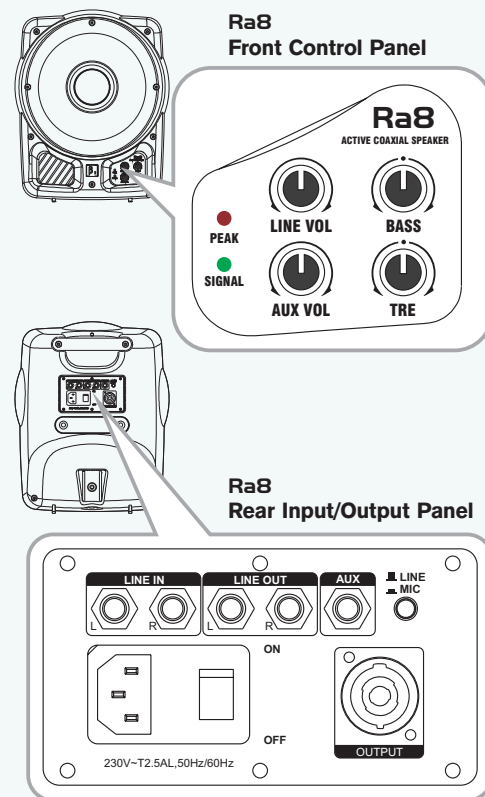


SPECIFICATION

Transducers(Ra8/R8s)	Woofer:8"×1 HF:3"×1
Frequency Response(-3dB)	65Hz-15kHz
Max SPL(1m)	115dB(1 Set)
Connectors	input:1/4"jack output:1/4"jack@NL4
Weight(Ra8)	8.5kg
Weight(R8s)	6.5kg
Shipping Weight(1 Set)	19kg
Dimensions (WxDxH)	323 × 271 × 397mm(Ra8/R8s)
Packing Dimensions (WxDxH)	630×374×453mm(1 Set)

! Attention: R8s only can be available to work with Ra8.

CONNECTION DRAWING

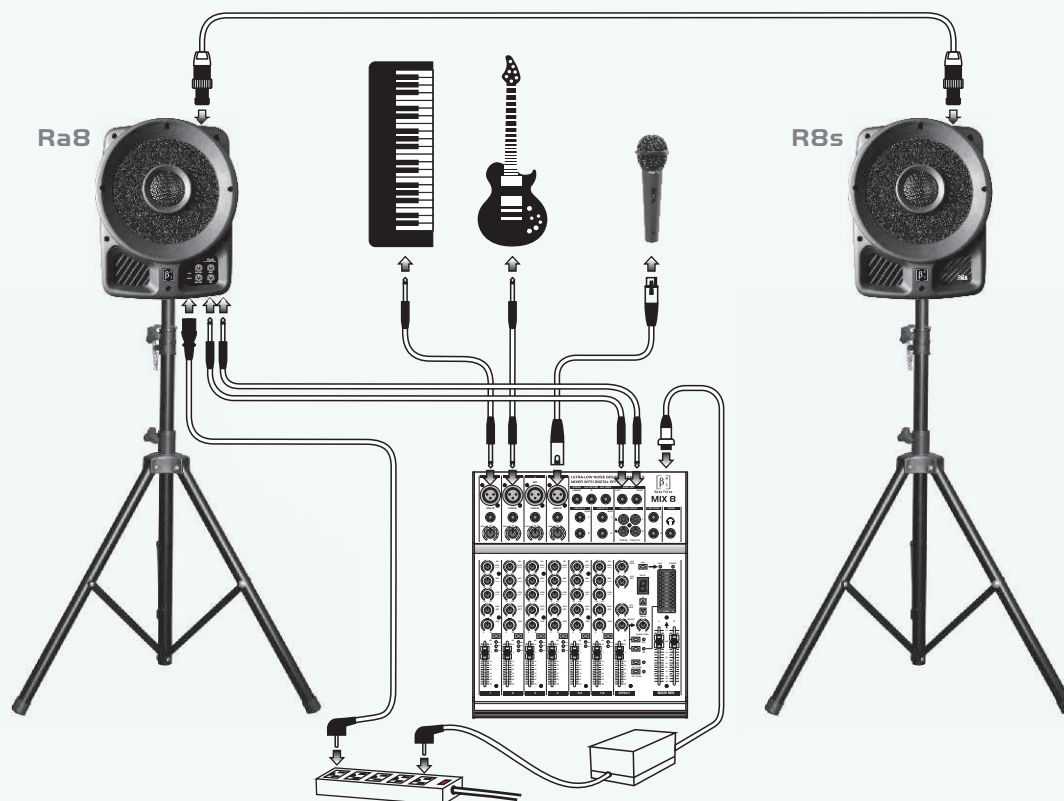

OPTIONAL EQUIPMENTS

<p>8channel digital mixer</p>  <p>Model: Ra-P01</p>	<p>Microphone</p>  <p>Model: Ra-P03</p>	<p>Tripod</p>  <p>Model: Ra-P04</p>
<p>System bag</p>  <p>Model: Ra-P02-8</p>	<p>Tripod bag</p>  <p>Model: Ra-P05</p>	

SYSTEM LIST

	Discription	Model	Qty	Remark
1	Speaker	R8T		
2	Mixer	Ra-P01		
3	System bag	Ra-P02-8		
4	Microphone	Ra-P03		
5	Tripod	Ra-P04		
6	Tripod bag	Ra-P05		